




MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-VB Kit


MAXHUB XT10-VB Kit showcases its versatility with the addition of an exceptional Videobar. Designed with simplified front-line one-cable deployment and remarkable expandability, this bundle effortlessly accommodates the evolving needs of multiple devices. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.

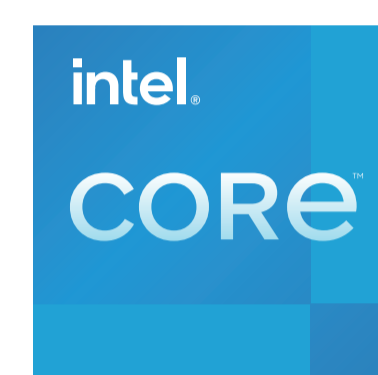


One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Product Specification

Type	Mini-PC
CPU	Intel i3-1220P TDP: 28W
Memory	8GB DDR4 3200MHz
Optional hard disk	128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors;
Chipset	ADL PCH-P
Sound Card	USB Audio, HS-100B, Cmedia
Network	1000Mbps RJ45
Operating system	Windows 11 IoT Enterprise SAC

Certifications

Certifications	Microsoft Teams Rooms
----------------	-----------------------

I/O Port

USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI OUT	1
Audio OUT	1
AC POWER	1
Kensington lock slot	1

Power

Power Supply Mode	AC POWER
Power Requirements	100-240V AC 50/60Hz
Max Power	90W

Accessories (included in the package)

Wall Bracket	×1
PC Bracket	×1
Cable Cover Screw	×2
Machine Screw	×4
Expansion Screw	×4
Self-tapping Screw	×4
Cable Cover	×1
HDMI Cable (1.8m/5.9ft)	×1
Power Cord (1.8m/5.9ft)	×1
Quick Start Guide	×1

Physical Specifications

Dimension L × W × H	230mm × 185mm × 41.5mm / 9.06" x 7.28" x 1.63"
Dimension (package) L × W × H	342 × 246 × 146mm / 13.46" x 9.69" x 5.75"
Net Weigh	1.36kg / 3lbs
Gross Weight	4.36kg / 9.6lbs

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m/196850"

Display

Size	10.1 inch
Resolution	1920 (H) x 1200 (V)
Frequency Refresh Rate	60Hz
NTSC	Min.62%, Typ.65%
Back Light Unit	ELED
Brightness with glass	Min.250cd/m ² , Typ.300cd/m ²
Life Time	≥ 20000 Hours

Touch System

Type	Capacitive touch
Touch Tool	Finger
Accuracy	± 2mm / 0.08"
Touch Point	10 points touch
Minimum object size	6mm / 0.24"

I/O Port

HDMI INGEST (SCREEN SHARE)	1
USB-A (USB PERIPHERAL)	1
USB-C (TO PC)	1
3.5mm (AUDIO OUT)	1

Physical Specifications

Dimension L×H×D	245 × 164.3 × 77.4mm / 9.65" x 6.47" x 3.05"
Dimension (package) L×W×H	332 × 246 × 166mm / 13.07" x 9.69" x 6.54"
Net Weight	880g / 1.94lbs
Gross Weight	2.38kg / 5.25lbs

Accessories (included in the package)

USB Type-C Cable (Type C-C) 5m / 16.4ft	×1
HDMI Cable 1.8m / 5.9ft	×1
Quick Start Guide	×1

Power

Power Requirements	15V 3A (Type-C PD)
Overall Power (Max.)	20W
Standby Power	≤ 0.5W

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%~90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%~90%RH
Altitude	Below 5000m/ 196850"

Camera			
Pixel	12MP		
Sensor	1/2.3-inch 12MP Sony sensor		
Resolution and Frame Rate			
H.264/MJPEG	(1) 3840 x 2160	(2) 2560 x 1440	(3) 1920 x 1080
	(4) 1280 x 720	(5) 1024 x 576	(6) 960 x 540
	(7) 800 x 600	(8) 640 x 480	(9) 640 x 360
	(10) 480 x 270	(11) 352 x 288	(12) 320 x 240
	YUY2	(1) 640 x 480	(2) 640 x 360
	(4) 352 x 288	(5) 320 x 240	(6) 320 x 180
	(7) 160 x 120		
ZOOM	5x Digital Zoom		
Output Format	MJPEG; YUY2; H.264		
Field Of View	120° (D)		
Adjustable Angle	± 15° (V)		
Focus Mode	Fixed-Focus		
Focus Distance	1m/39.4"		
Special Features	Auto Framing: automatic adjustment FOV to fit in all participants Speaker Tracking: voice triggered people tracking 10 Zooming Pre-sets for instant setting up		

Power	
Power Requirements	12V
Overall Power(Max.)	10W
PoE Power	Yes (IEEE 802.3af or 802.3at)

System Requirements	Supports Windows XP/7/8.1/10/11, Android 8.1 or higher, and MAC OS 10.12 or higher
---------------------	--

Application Supported	MAXHUB Align software for Windows & Mac OS
-----------------------	--

PIR Sensor	In power-on mode, it will automatically enter standby state If no moving object is detected within 3 meters within 30 minutes, minimizing energy consumption; In standby mode, it automatically starts up when detecting moving objects within 3 meters, simplifying the setup process.
------------	---

Mount	Wall-mounted TV mount kit (Optional)
-------	---

Physical Specifications	
Dimension(Lx Hx D)	462 x 76 x 93 mm (18.2 x 3.0 x 3.7 inch)
Dimension(package)(Lx Hx D)	1pcs 538 x 160 x 169 mm (21.2 x 6.3 x 6.7 inch)
	4pcs 628 x 433 x 380 mm (24.7 x 17.0 x 15.0 inch)
Net Weight	1.05Kg/2.31lbs
Gross Weight	1pcs 2.55kg/5.62lbs
	4pcs 12.00kg/26.46lbs

Audio	
Speaker	
Sound Chanel	1.1
Output Power	8W + 3W
Maximum Sound Pressure	80dBSPL@1m
Signal to Noise Ratio	>75dB
Frequency Range	150Hz ~ 18kHz
Microphone	
Microphone Quantity	6
Voice Pickup Range	8m/314.96"
Microphone Frequency Range	100Hz ~ 7.5kHz
Special Features	Noise Reduction, Echo Cancellation, Anti-Reverberation, Built-in AGC Algorithm

Input/Output Port	
USB 3.0 Type-C	Connect USB host, upgrade system, etc.
Audio Out	Used for external audio equipment
DC 2.0	Used for 12V power input power supply
RJ45	No IP Support, only provides PoE power

Compatibility	
Support major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.	

Environmental Condition	
Operation Temperature	0°C - 40°C
Operation Humidity	10% - 90%RH
Storage Temperature	-20°C - 60°C
Storage Humidity	10% - 90%RH
Altitude	Below 5000m/196850"

Warranty	3 Year hot swap	Accessories one year
----------	-----------------	----------------------

What's In The Box	
included	1 x USB Cable (1.8m/70.9 inch), 1 x Remote Control 1 x Power Adapter, 1 x Wall-mounted Components, 1 x Peeping Cover


XCore Kit Package Includes

- XC13T Mini-PC x1
- TCP20T Touch Control Panel x1
- UC S07 x1

Package Physical Specifications

- Dimension (package) L×W×H 705x440x265mm / 27.76"x17.32"x10.43"
- Net Weight 9.068kg/19.99lbs
- Gross Weight 11.49kg/25.33lbs

Connection

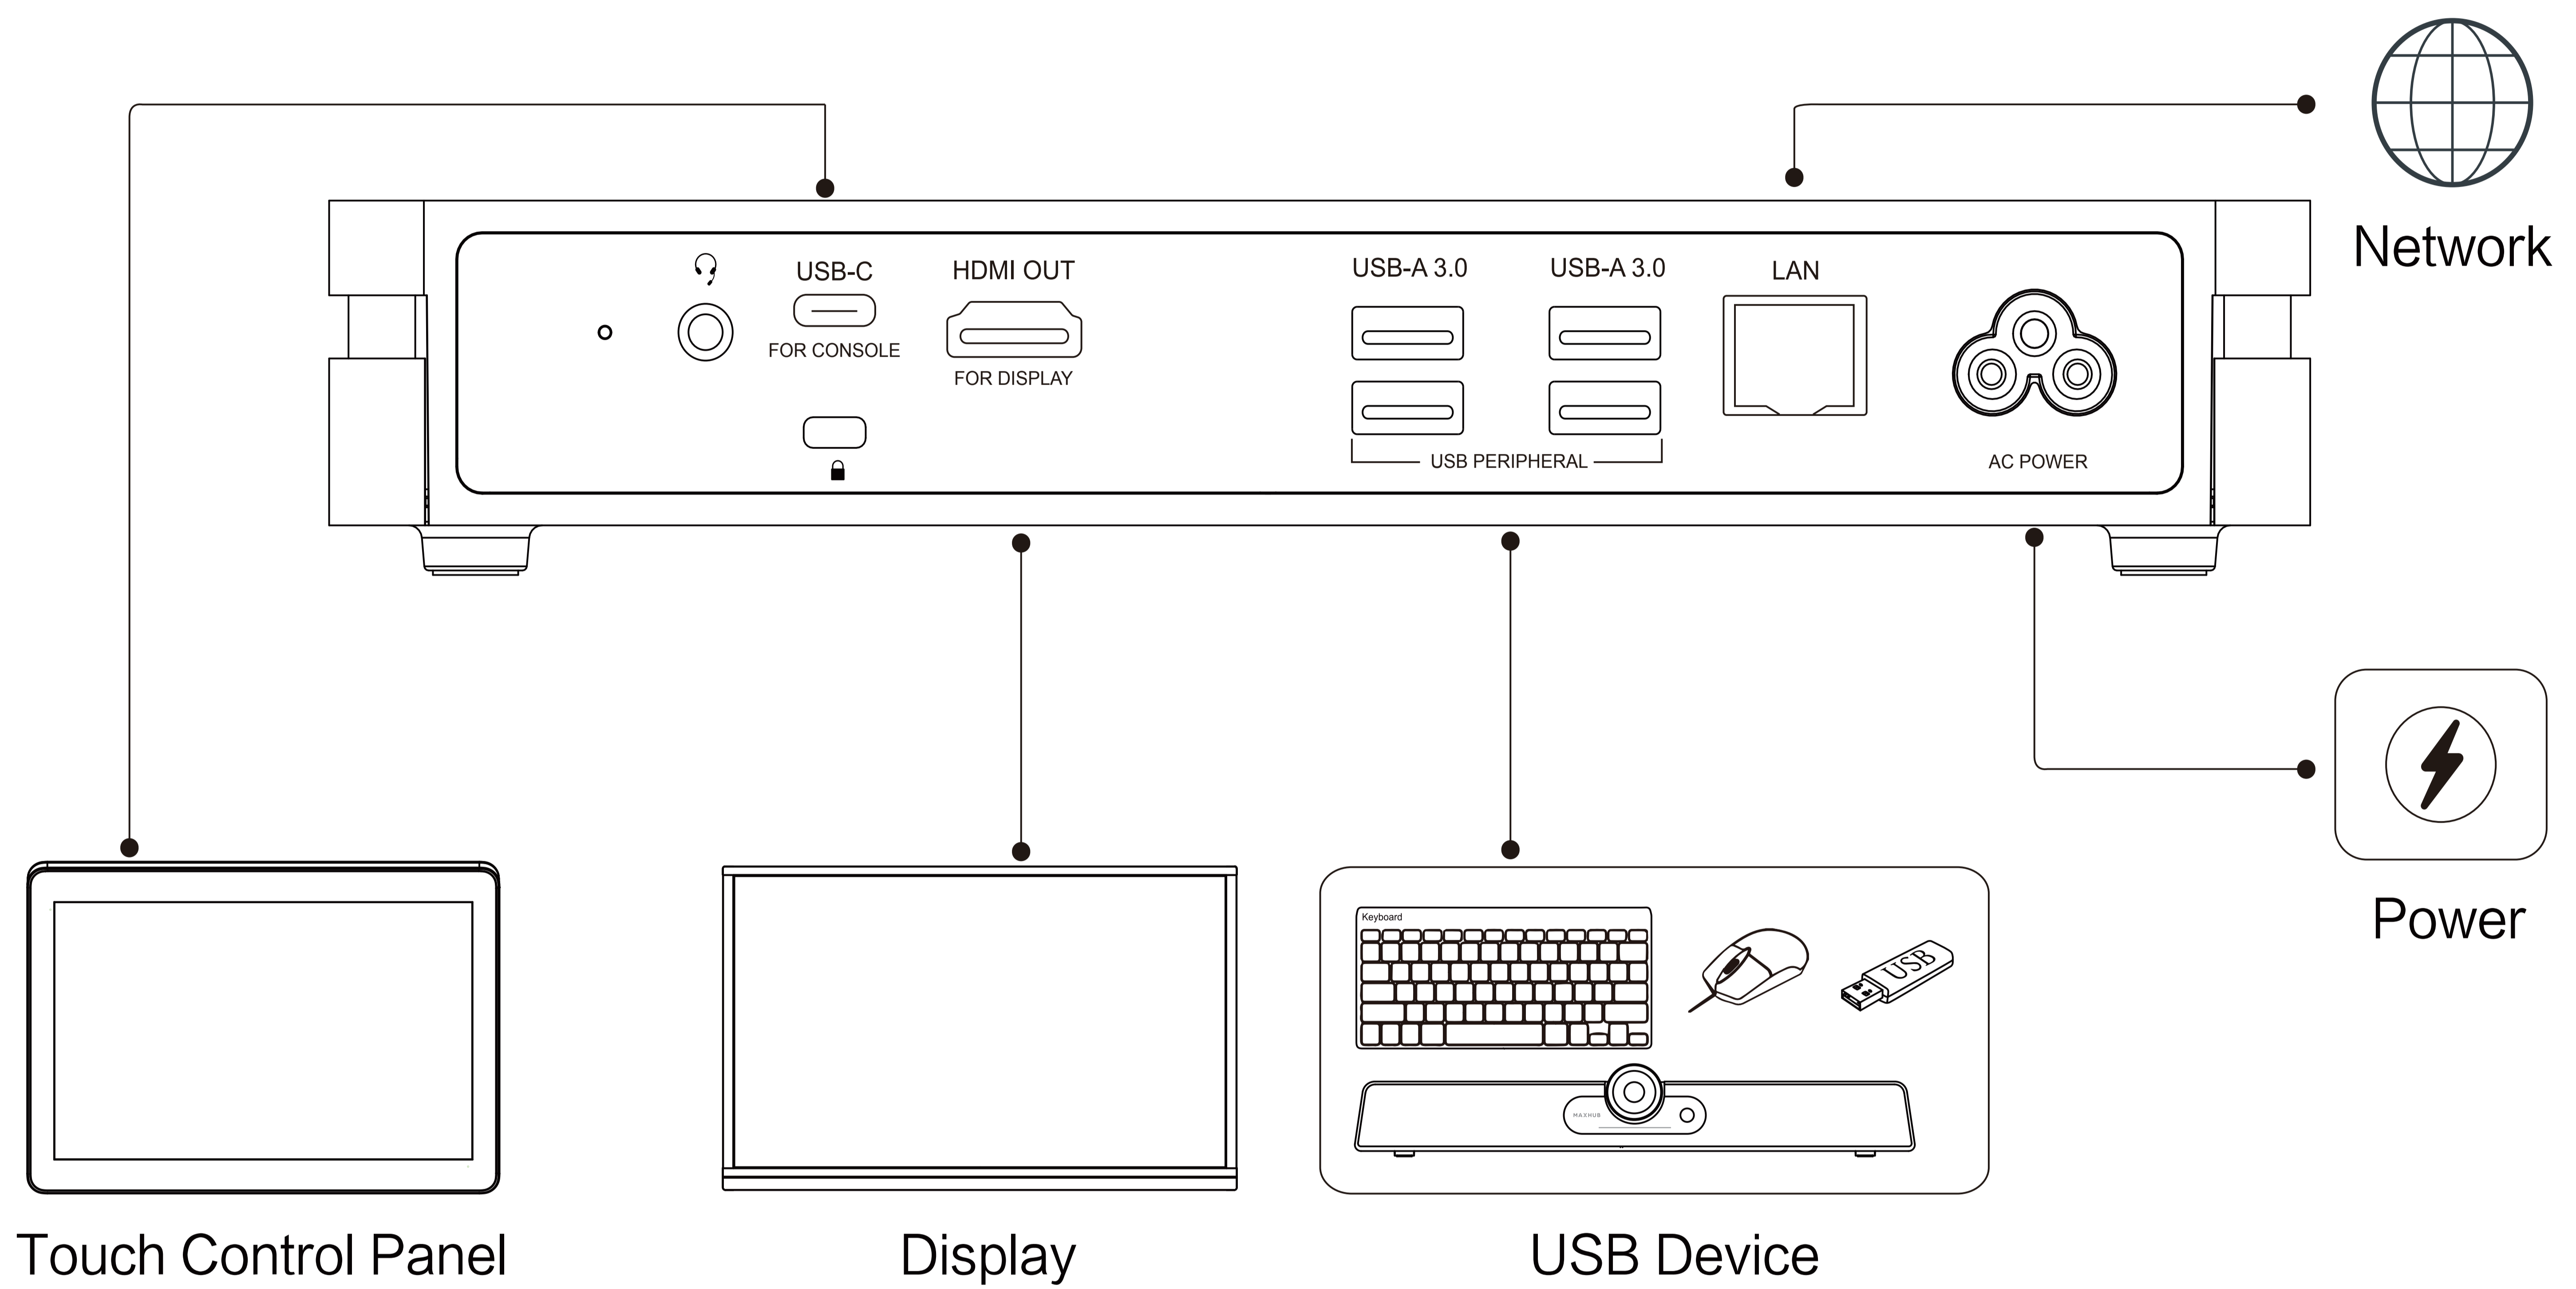

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.