



1	2	3	4	5	6	7
WEIGHT		CUSTOMER NO:		REMARK		
409g-K6		35655A		INTOS		

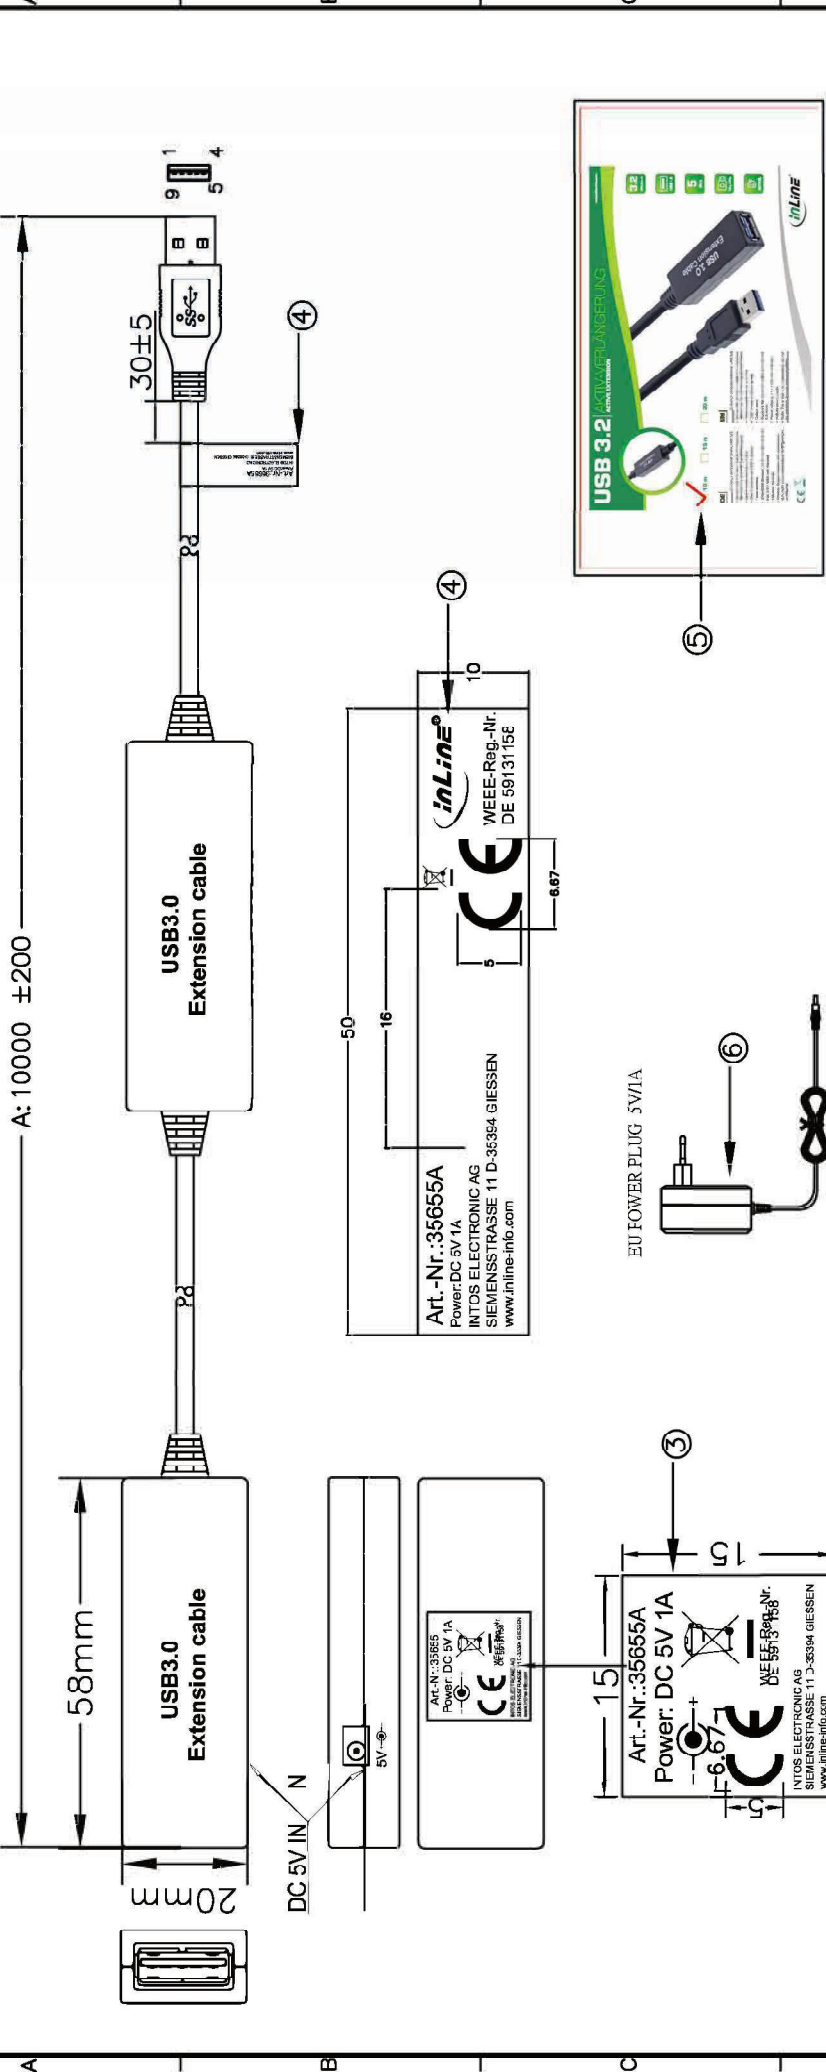

A	REV.	ECR	✓	FIRST EDITION	SHERRY	202 / 10/02
			DESCRIPTION	C.N.	DATE	
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF STL GROUP. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE PRIOR WRITTEN PERMISSION OF STL GROUP INTERNATIONAL LIMITED.</p>						
<p>UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE ±10°</p>						
DIMENSIONS		TOLERANCE		TITLE		
0.00 TO 30.00mm		±0.10mm		USB3.2 Extension cable 10M		
30.01 TO 80.00mm		±0.13mm		CHKD. CONF.		
80.01 TO 150.00mm		±0.15mm		DR. FPZ		
150.01mm		±0.20mm		PART N O		
MATERIAL				SCALE		
FINISH				UNIT		
				1 / A		


- NOTE:
- 1) PRIMARY DIMENSION: A, B, C, D
 - 2) The black casing of the product is printed with silver characters and neutral RoHS.
 - 3) IPC / color box + IPC European power supply.
 - 4) The 10 * 50MM sticker is attached to the wire, at a distance of A / M SR 30MM.
 - 5) 50 * 90 stickers are attached to both sides of the carton.
 - 6) 15 * 15MM power sticker is attached to the center of the back of the shell with DC hole and the power supply.
 - 7) Use stickers to tick the corresponding size of the color box as shown in the figure.
 - 8) Wrap with Velcro film, the Velcro cannot be wrapped on the product shell.
 - 9) RoHS COMPLIANT.

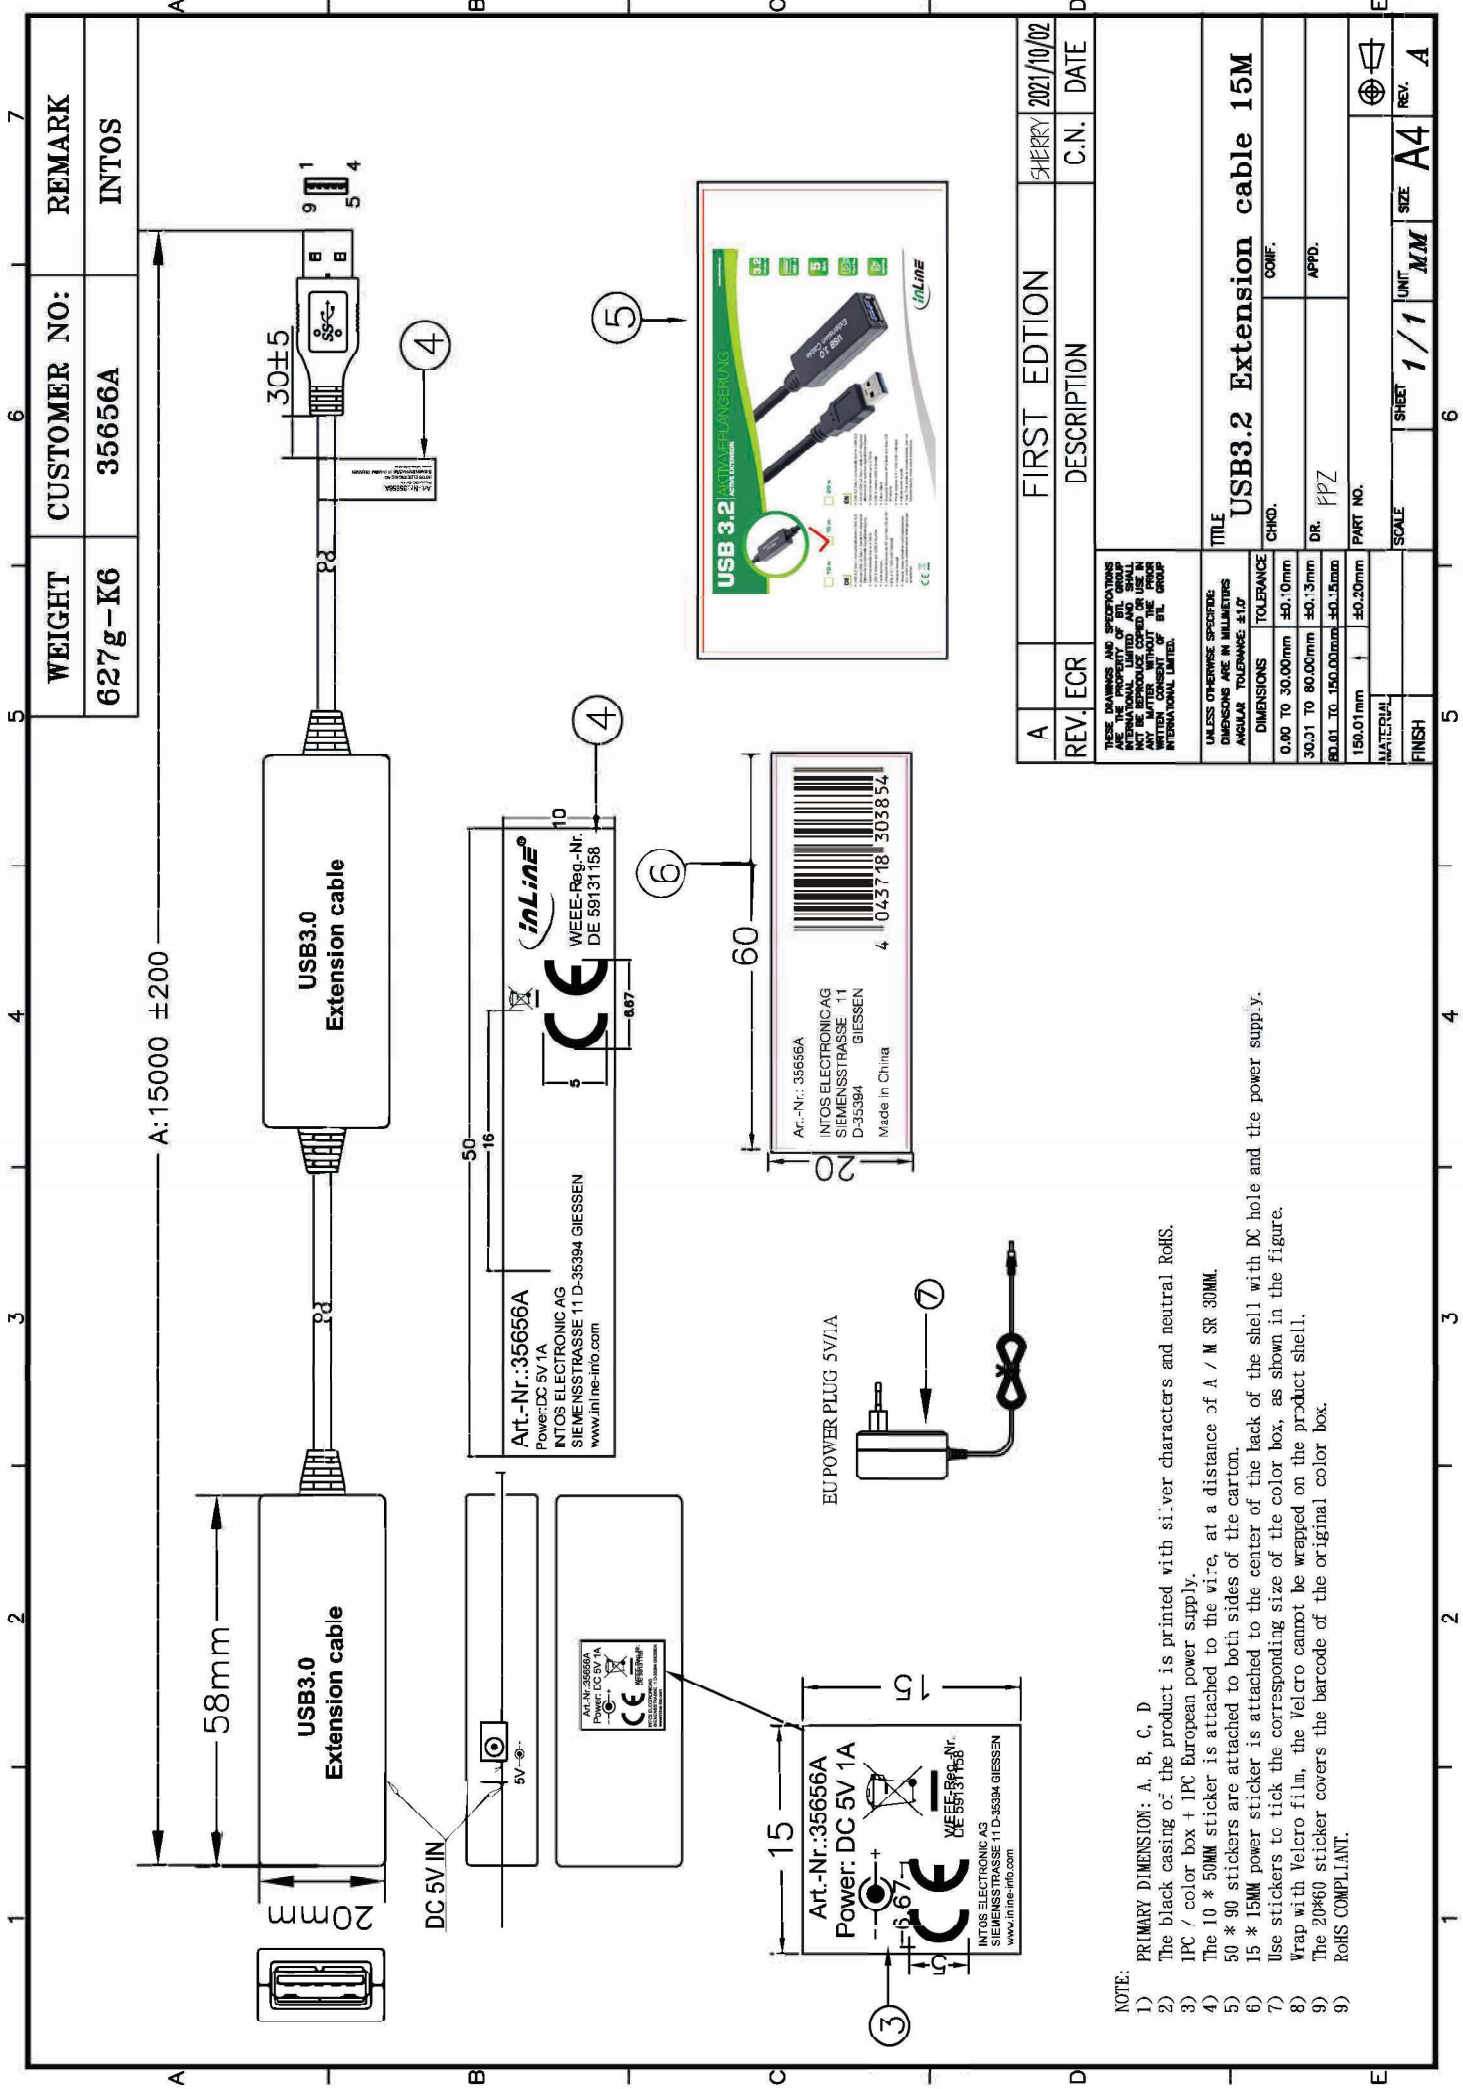


WEIGHT	CUSTOMER NO.:	REMARK
627g-K6	35656A	INTOS

A	REV.	DESCRIPTION	DATE
	ECR	FIRST EDITION	2021/10/02
		C.N.	DATE
<small>THE DIMENSIONS AND SPECIFICATIONS OF THIS PRODUCT ARE THE PROPERTY OF INTELLECTUAL PROPERTY RIGHTS AND SHALL BE KEPT IN CONFIDENCE BY THE BUYER. ANY REPRODUCTION OR DISTRIBUTION WITHOUT THE WRITTEN CONSENT OF INTELLECTUAL PROPERTY RIGHTS IS STRICTLY PROHIBITED.</small>			
TITLE		USB3.2 Extension cable 15M	
CHKD.		CONF.	
DIMENSIONS		TOLERANCE	
0.80 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.13mm	
80.01 TO 150.00mm		±0.15mm	
DR.		APPD.	
PART NO.		PART NO.	
150.01mm + ±0.20mm			
MATERIAL			
FINISH			
SCALE	SHEET	UNIT	SIZE
	1 / 1	MM	A4
		REV.	A

- NOTE:**
- 1) PRIMARY DIMENSION: A, B, C, D
 - 2) The black casing of the product is printed with silver characters and neutral RoHS.
 - 3) IPC / color box + IPC European power supply.
 - 4) The 10 * 50MM sticker is attached to the wire, at a distance of A / M SR 30MM.
 - 5) 50 * 90 stickers are attached to both sides of the carton.
 - 6) 15 * 15MM power sticker is attached to the center of the back of the shell with DC hole and the power supply.
 - 7) Use stickers to tick the corresponding size of the color box, as shown in the figure.
 - 8) Wrap with Velcro film, the Velcro cannot be wrapped on the product shell.
 - 9) The 20*60 sticker covers the barcode of the original color box.



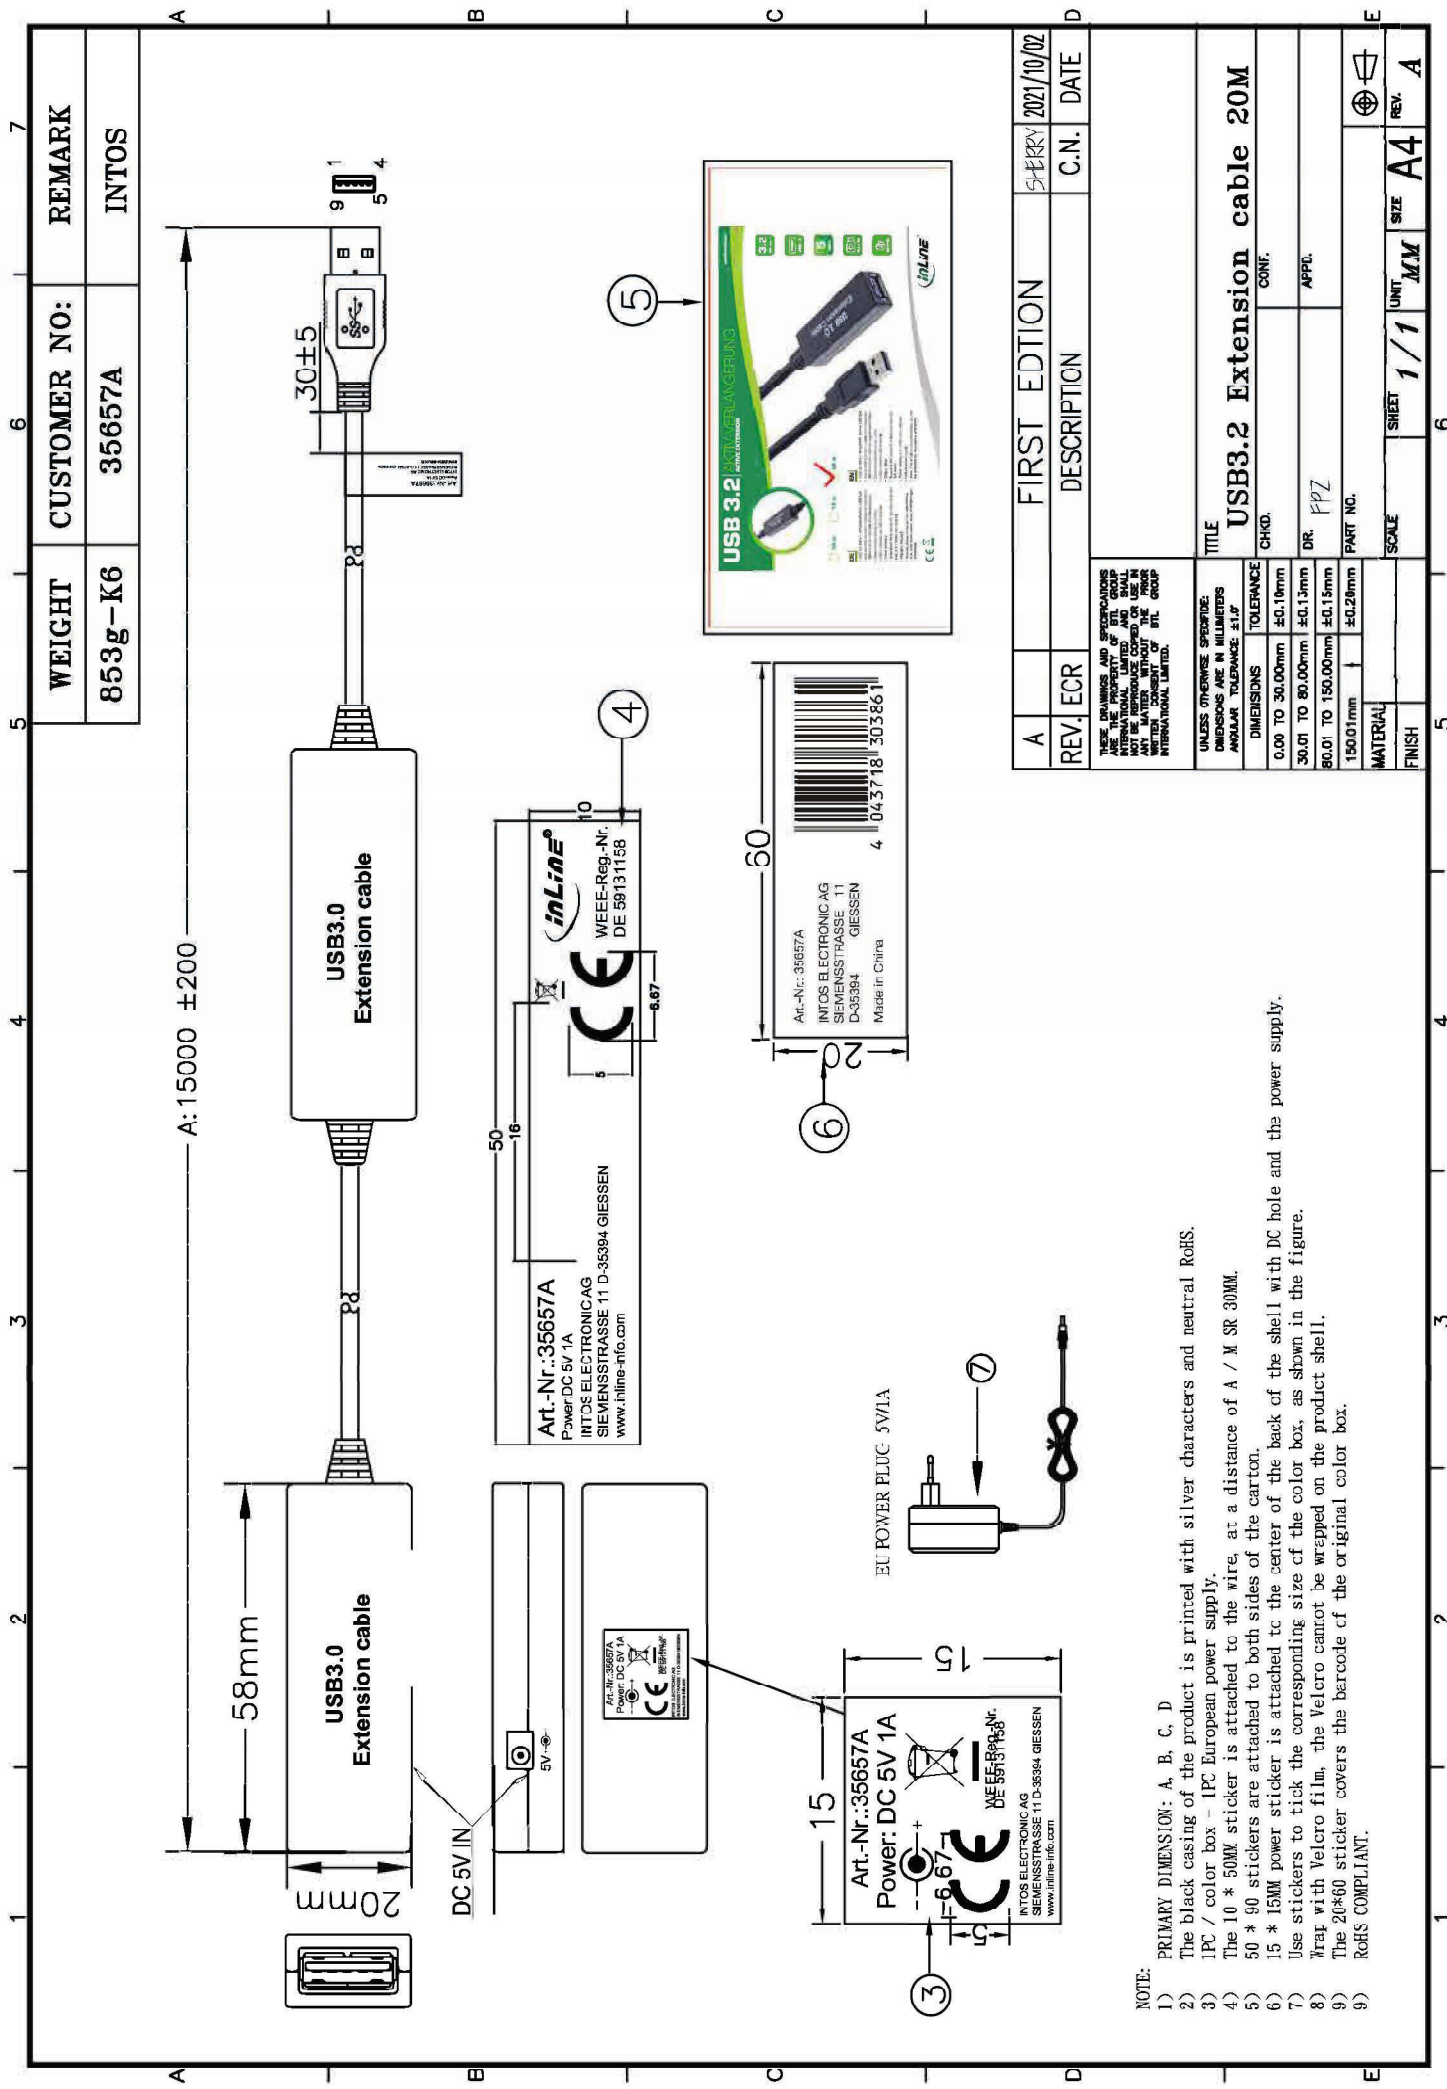

WEIGHT	CUSTOMER NO:	REMARK
853g-K6	35657A	INTOS

A	FIRST EDITION	2021/10/02
REV. ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF BIL GROUP. ANY REPRODUCTION OR USE IN ANY MANNER WITHOUT THE PRIOR INTERNATIONAL LIMITED.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	TITLE	UNIT
ANGULAR TOLERANCE: ±1°	USB3.2 Extension cable 20M	MM
DIMENSIONS	CHKD.	CONF.
0.00 TO 30.00mm ±0.10mm		
30.01 TO 80.00mm ±0.15mm	DR.	APPL.
80.01 TO 150.00mm ±0.15mm	PART NO.	
15001mm ±0.20mm	SCALE	1/1
MATERIAL	FINISH	SIZE
		A4
SHEET	6	REV. A

- NOTE:**
- 1) PRIMARY DIMENSION: A, B, C, D
 - 2) The black casing of the product is printed with silver characters and neutral RoHS.
 - 3) IPC / color box - IPC European power supply.
 - 4) The 10 * 50MM sticker is attached to the wire, at a distance of A / M SR 30MM.
 - 5) 50 * 90 stickers are attached to both sides of the carton.
 - 6) 15 * 15MM power sticker is attached to the center of the back of the shell with DC hole and the power supply.
 - 7) Use stickers to tick the corresponding size of the color box, as shown in the figure.
 - 8) Tray with Velcro film, the Velcro cannot be wrapped on the product shell.
 - 9) The 20*60 sticker covers the barcode of the original color box.
 - 9) RoHS COMPLIANT.