
### **Product Specification**

#### 1. Product Feature



- ♦ Plug and play with integrated design.
- $\diamond$  FOV 120°, SONY 1/2.3, 12M
- ♦ 3 Zooming presets that instantly sets up for conference.
- ♦ An 8W+3W Speaker that satisfies the need for larger space.
- ♦ A 6-elements MEMS microphone array with high sensitivity and 8-metres voice pickup range.
- Noise reduction, echo cancellation, anti-reverberation, built-in AGC algorithm that enhances voice collection.
- Dual Wi-Fi module support wireless screen-sharing as well as network connection.
- Supports connecting with a laptop, working as a camera, speaker, and microphone.
- ♦ Support for POE power supply.

#### 2. Dimension

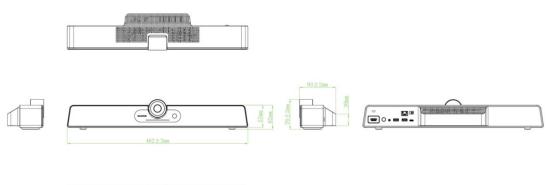



#### 3. Camera

Pixel	12M
	MJPG/H264:
	(1)3840×2160 (2)2560×1440 (3)1920×1080
	(4)1280 × 720 (5)1024 × 576 (6)960 × 540
Resolution and Frame	(7)800 × 600 (8)640 × 480 (9)640 × 360
Rate	(10)480×270 (11)352×288 (12)320×240
	(13)320 × 180
	NV12/YUY2:
	(1)1920 × 1080 (2)1280 × 720 (3)640 × 360
Output Format	H.264;YUY2;MJPG
Field of View	FOV 120° (D)
Adjustable Angle	0
Focus mode	fixed-focus
Focus distance	1m

#### 4. Operating System

System Version	Android 9.0
----------------	-------------

RAM	4G
ROM	16G
CPU	2 × A72+4 × A53

#### 5. Speaker

Sound Channel	1.1
Output Power	8W+3W

#### 6. Microphone

Quantity	6	8
Voice Pickup Range	100Hz~7.5kHz	
7. Wi-Fi		$\mathbf{\bigcirc}$

within.

#### 7. Wi-Fi

Version	802.11a/b/n/g/ac/ax		
Working Frequency	2.4GHz;5GHz		
Working Distance	0~10m		

#### 8. Power

8. Power	
Power Requirements	12V
Overall Power(Max.)	24W
Standby Power	≤0.5W

### 9. I/O port

USB Type-C	1
USB 3.0	1
USB2.0	1
AUDIO OUT	1
HDMI OUT	1
DC 2.0	1
RJ45	1

#### 10. Physical Specifications

Dimension L × H × D		462×76×93	
Dimension 1pc		538 × 160 × 169mm	
(package) $L \times W \times H$	4pcs	628 × 433 × 380mm	
Net Weight		1.1Kg	
Gross Weight	1pcs	TBD	
	4pcs	TBD	

#### 11. Accessories

HDMI Cable	×1	
Peeping Cover	× 1	
Wall-mounted Components	×1	
Power Adapter	×1	
Remote Control	× 1	

#### 12. Environmental Conditions

Operation Temperature	0°C − 40°C
Operation Humidity	10% – 90%RH
Storage Temperature	−20°C − 60°C
Storage Humidity	10% – 90%RH
Altitude	Below 5000 meters

#### 13. Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product.

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.

Should the above-mentioned change in the document become necessary, the document may be updated without written notice.