


# newline


*All Stars*

Naos is a hot blue supergiant and the nearest class O star to the Sun. Naos is one of the most luminous stars visible to the naked eye.

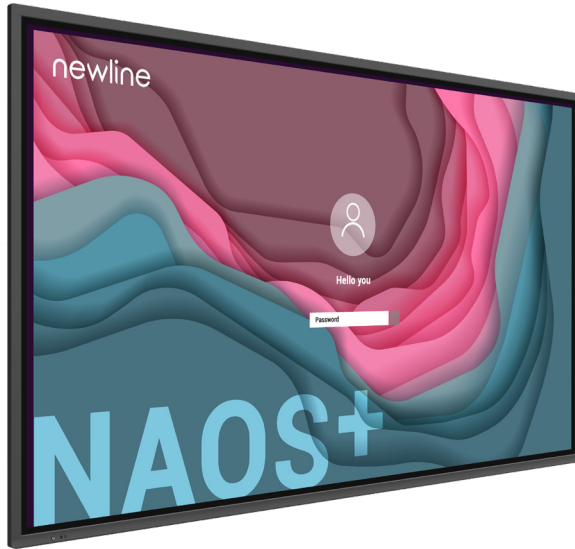

## YOUR BEST BET FOR **HIGH-END SECURITY**

When security is your absolute priority, Naos+ is your best bet. No embedded Android makes this premium solution enterprise-level security, designed for the corporate workspace and higher education. The enhanced connectivity, OPS and SDM slots, and the immersive AV experience make the slim design Naos+ the perfect high-end solution for corporates, universities and training academies.

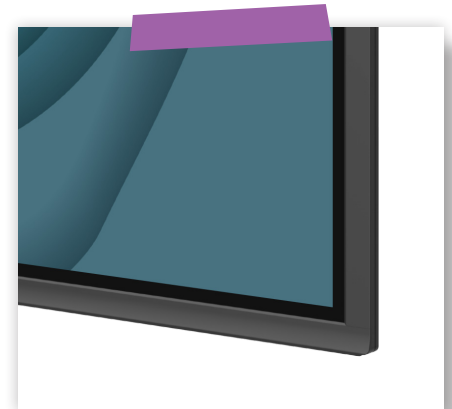

### NEWLINE INTERACTIVE ECOSYSTEM

The completely renewed Interactive Ecosystem is full of software that helps you use your interactive display to the max. Whether it's setting up your video conference super fast, using concept mapping to brainstorm, connecting your device, sharing your screen or broadcasting!

**CAST** **BROADCAST** **ENGAGE** **LAUNCH CONTROL** **REACTIV SUITE**



Maximum Viewing Angle



65 W Powered USB Type-C



Diverse Connectivity



Broad Compatibility



Crystal Clear Image Quality



Wide Range of Sizes

55"

65"

75"

86"

## MODEL

Naos+ 55"	TT-5521IP
Naos+ 65"	TT-6521IP
Naos+ 75"	TT-7521IP
Naos+ 86"	TT-8621IP

## DISPLAY

Backlight	Direct LED ( Wide color gamut + Anti blue light)
Display Area	55" 4K: 1211 x 682 mm 65" 4K: 1428 x 804 mm 75" 4K: 1650 x 928 mm 86" 4K: 1895 x 1066 mm
Display Ratio	16:9
Resolution	3840 x 2160 (4K)
Colors	1,07 Billion ( 8bit+FRC)
Brightness	400 cd/m <sup>2</sup>
Contrast Ratio (Dynamic)	5000:1
Response Time	6 ms
Viewing Angle	H = 178, V = 178 typ.
Display Life Time	≥50000 hours

## POWER CONSUMPTION

Power Consumption (Eco mode)	55" 4K: 150 W 65" 4K: 179 W 75" 4K: 233 W 86" 4K: 283 W
Power Consumption (Standby mode)	<0.5 W

## TOUCH TECHNOLOGY

Touch Surface Material	P-CAP
Touch Surface Technology	Anti-Glare+Anti-Fingerprint + Antimicrobial Tempered Glass
Transparency	88%±3
Haze	2%~5%
Touch Surface Hardness	8H
Touch Sensor	Projective Capacitive
HID Support	yes
Touch Points	20 Windows
Touch Screen Writing Tools	Stylus, Finger, Palm
Positioning Accuracy	±1

## SPEAKER

Speaker Position	Downward
Speaker Rated Impedance	55" 4K: 6 Ω 65" 4K: 8 Ω 75" 4K: 8 Ω 86" 4K: 8 Ω
Speaker Max.Power Output	55" 4K: 20 W x 2 65" 4K: 15 W x 2 75" 4K: 15 W x 2 86" 4K: 15 W x 2

## I/O

HDMI In (4K60 Hz)	3 (HDMI 1 w/ARC)
HDMI Out (4K60 Hz)	1
USB Type B (Touch)	3
USB 3.0 Type C (PD 65 W)	1
USB 2.0 (Embedded)	1
USB 3.0 (Dynamic)	1
Gigabit LAN (RJ45 )	1 (Built-in HUB for OPS/SDM Pass through)
RS-232	1
Mic In	1
Line Out	1
SPDIF Out	1
OPS Connector	1
SDM-S Slot	1
Power Delivery Connection (180 W)	1

## SMART SYSTEM

SoC Chipset	MSD3683QTA
RAM	3 GB DDR3
Storage	64 GB
Android Version	No Android
Multimedia File Formats Support For Image	JPEG, BMP, PNG
Multimedia File Formats Support For Video	MPEG2, MPEG4, H264, HEVC(H.265)
Multimedia File Formats Support For Audio	WMA, MP3, M4A, (AAC)

## TRANSPORTATION / STORAGE

Outline Dimension (without wall mount bracket thickness)	55" 4K: 1290 x 764 x 73 mm 65" 4K: 1509 x 865 x 86 mm 75" 4K: 1731 x 1010 x 86 mm 86" 4K: 1977 x 1150 x 86 mm
Net Weight	55" 4K: 28 Kg 65" 4K: 36 Kg 75" 4K: 49 Kg 86" 4K: 60 Kg
VESA	55" 4K: 400 x 400 mm 65" 4K: 600 x 400 mm 75" 4K: 800 x 400 mm 86" 4K: 800 x 400 mm