

MAXHUB


1. Product Feature



- ✧ Plug and play with integrated design.
- ✧ Featuring FOV 120 degrees, with a 1/2.3-inch 12MP Sony sensor.
- ✧ 5x Digital Zoom.
- ✧ 3 Zooming pre-sets that instantly sets up for conference.
- ✧ An 8W Speaker that satisfies the need for larger space.
- ✧ A six-elements MEMS microphone array with high sensitivity and 8-metres voice pickup range.
- ✧ Noise reduction, echo cancellation, anti-reverberation, built-in AGC algorithm that enhances voice collection.
- ✧ Dual Wi-Fi module support wireless screen-sharing as well as network connection.
- ✧ Supports connecting with a laptop, working as a camera, speaker, and microphone.
- ✧ Flexible installation including wall-mounting or putting on desks.

MAXHUB

2. Dimension

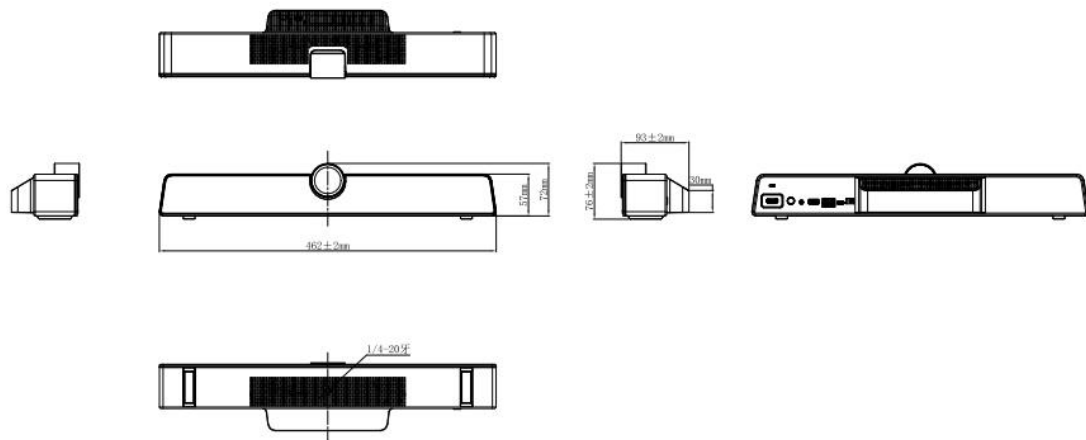

3. Camera

Pixel	12M
Resolution and Frame Rate	H.264/MJ: (1)3840 × 2160 (2)2560 × 1440 (3)1920 × 1080 (4) 1280 × 720 (5)1024 × 576 (6)960 × 540 (7)800 × 600 (8)640 × 480 (9)640 × 360 (10)480 × 270 (11)352 × 288 (12)320 × 240 YUY2: (1)640 × 480 (2)640 × 360 (3)480 × 270 (4)352 × 288 (5)320 × 240
Output Format	MJPEG/YUY2/H.264
Field of View	FOV 120° (D)
Adjustable Angle	Up and down 15° by manual adjustment
Focus mode	Fixed focus
Focus distance	2m

4. Operating System

System Version	Android 9.0
----------------	-------------

MAXHUB

RAM	4G
ROM	16G
CPU	2 × A72+4 × A53
GPU	Mali-G51

5. Speaker

Sound Channel	1.0
Output Power	1 × 8W

6. Microphone

Quantity	6
Voice Pickup Range	0~8m

7. Wi-Fi

Version	802.11 a/b/g/n/ac
Working Frequency	2.4GHz/5GHz
Working Distance	0~10m

8. Power

Power Requirements	12VDC 3.0A
Overall Power(Max.)	36W
Standby Power	≤0.5W

9. I/O port

USB Type-C	1
USB 3.0	1
AUX	1
HDMI OUT	1

MAXHUB

DC 2.0	1
RJ45	1

10. Physical Specifications

Dimension L × H × D	462 × 76 × 93mm	
Dimension (package) L × W × H	1pcs	540 × 160 × 170mm
	4pcs	628 × 433 × 380mm
Net Weight	1.03kg	
Gross Weight	1pcs	2.33kg
	4pcs	11.73kg

11. Accessories

HDMI Cable	× 1
Peeping Cover	× 1
Wall-mounted Components	× 1
Power Adapter	× 1
Remote Control	× 1

12. Environmental Conditions

Operation Temperature	0°C – 40°C
Operation Humidity	10% – 90%RH
Storage Temperature	-20°C – 60°C
Storage Humidity	10% – 90%RH
Altitude	Below 5000 meters

13. Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product.

MAXHUB

The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product.

The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.

Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

MAXHUB