

# FREESTYLE CHIEF-STYLE


The Freestyle Rotation Adapter enables an extremely wide variety of video wall configurations using either ConnexSys™ or Fusion® mounts. This versatile accessory provides infinite orientation possibilities, and the ability to overlap displays when combined with the FCADA Fusion depth accessory.

Use the information in this sheet to determine the best solution to support your unique configuration.

## CONFIGURATION STYLE


For configurations requiring precision multi-display alignment, we recommend **ConnexSys Series**.

Examples:

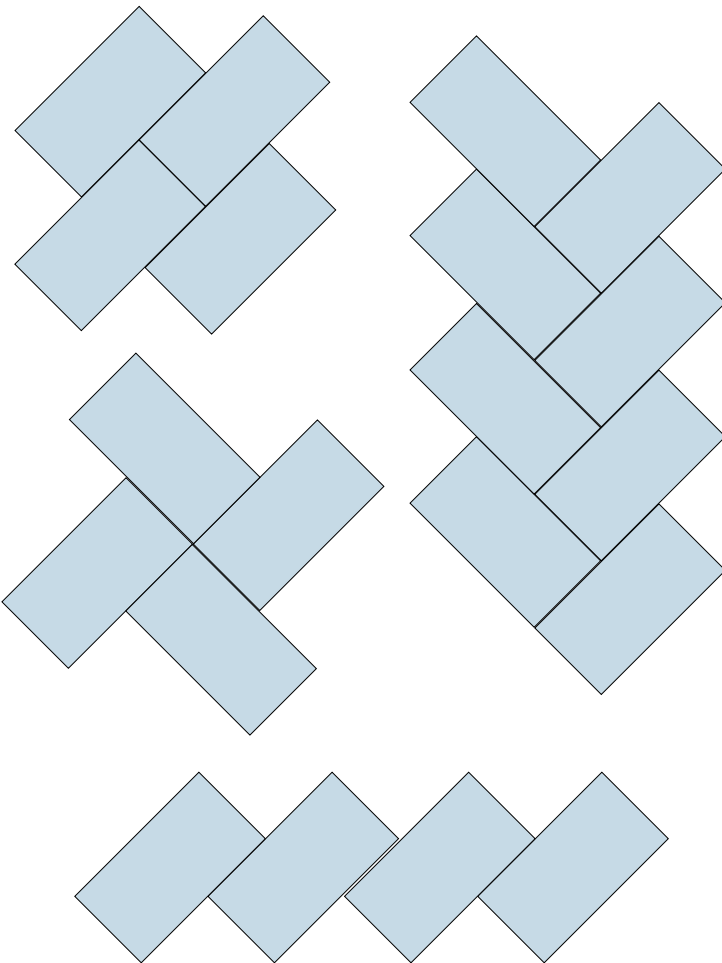

For configurations with overlapping displays, we recommend **Fusion Series single-stud mounts**.

Examples:

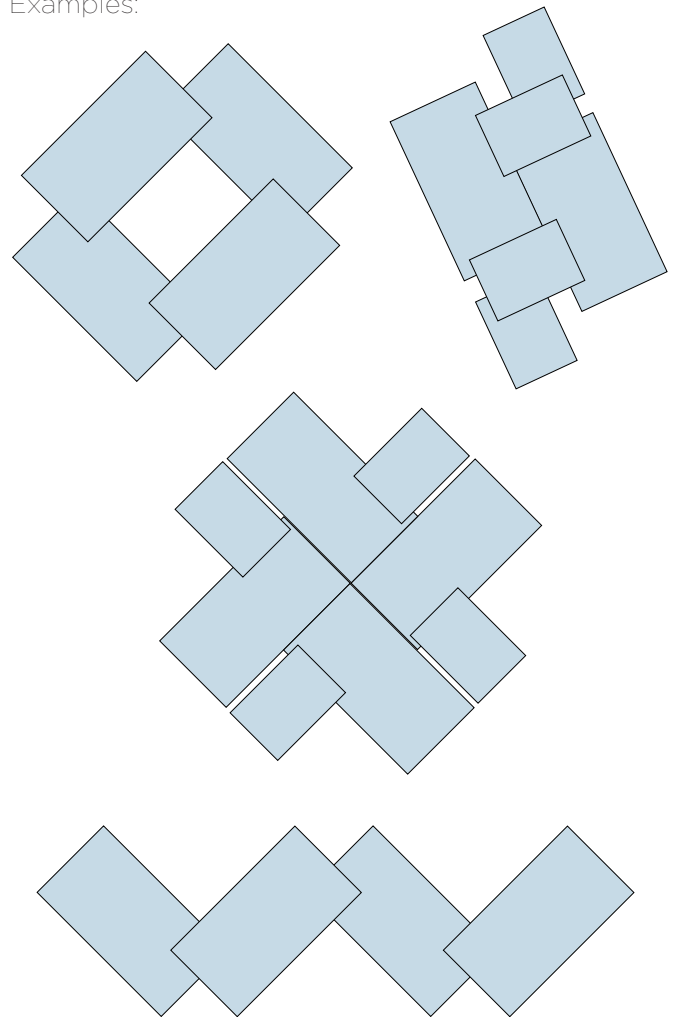

ConnexSys and Fusion Series mounts can be combined to accomplish an extensive range of freestyle configurations. For anything not listed here - including ceiling and cart/stand applications - please contact our Customer Care team. **P:** 866.977.3901 **E:** chief@chiefmfg.com

## DISPLAY COMPATIBILITY


MODEL	DESCRIPTION	TYPICAL DISPLAY SIZE	MINIMUM DISPLAY HEIGHT AT 45°	WEIGHT CAPACITY	MOUNTING PATTERN*
LVS1UP	ConnexSys Portrait Mount	55" +	27" (686 mm)	125 lbs (56.7 kg)	200 x 200; 200 x 300; 200 x 400; 300 x 300; 400 x 400
LVS1U	ConnexSys Landscape Mount	80" +	38.5" (978 mm)	125 lbs (56.7 kg)	
STMS1U	Fusion Single-Stud Mount	40" +	19" (483 mm)	55 lbs (24.9 kg)	
MTMS1U	Fusion Single-Stud Mount	40" +	19" (483 mm)	55 lbs (24.9 kg)	
MSM1U	Fusion Dual-Stud Mount	58" +	29" (737 mm)	105 lbs (47.6 kg)	

MODEL	DESCRIPTION	TYPICAL DISPLAY SIZE	MINIMUM DISPLAY HEIGHT IN PORTRAIT	WEIGHT CAPACITY	MOUNTING PATTERN*
MFAUB	Fusion Stand	50" +	24" (610 mm)	105 lbs (47.6 kg)	200 x 200; 200 x 300; 200 x 400;
MPAUB	Fusion Cart	50" +	24" (610 mm)	105 lbs (47.6 kg)	300 x 300; 400 x 400

\*Mounting pattern options are determined by the Freestyle Adapter (FRA).

## MINIMUM DISPLAY HEIGHT

The minimum display height noted in the chart above is the smallest display size that will cover the widest dimension of the mount being used. The minimum display height will increase if the display is rotated to lesser/greater angles. For assistance calculating the minimum display height at a different angle of rotation, please contact our customer care team.

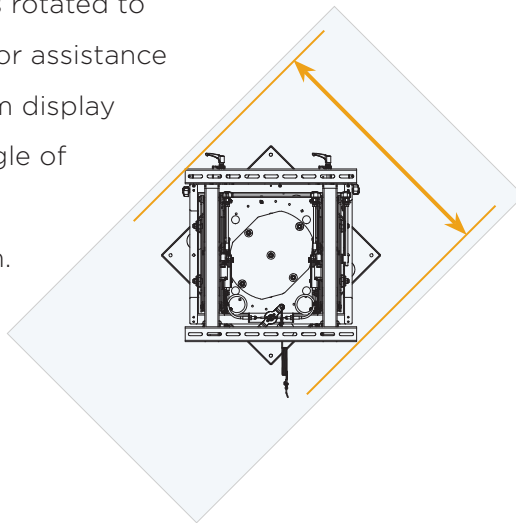

## FEATURES

### FRA - Freestyle Rotation Adapter

- Orientation: Infinite
- Rotation: 90° with positive lockouts at 15° increments
- Dimensions: 17.25 x 17.25 x 0.84" (438 x 438 x 21 mm)

### FCADA - Fusion Depth Accessory

- Depth Adjustments: 3.25, 4 and 4.75" (83, 102 and 121 mm)
- Dimensions: 6.38 x 13.5 x 4.75" (162 x 343 x 121 mm)